


RIGID COUPLINGS

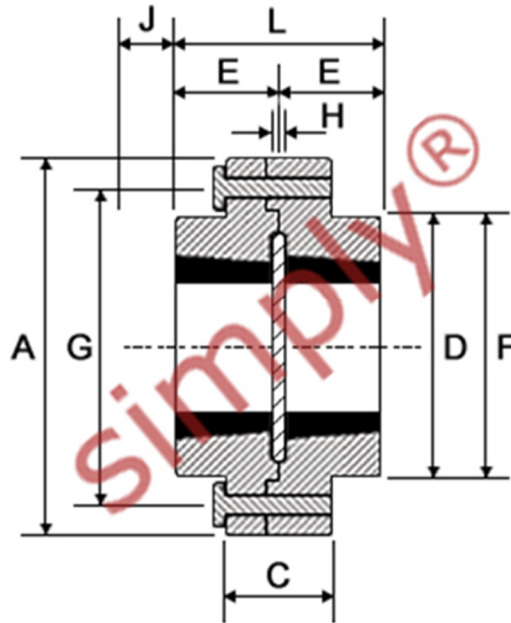

Coupling Assembly HF

Part No.	Bush No.	Max Bore		A	C	D	E	F Nominal	G Nominal	H†	J*	L	Mass ‡ (kg)
		Metric	Inch										
RM12 HF	1210	32	1 1/4"	118	35	83	25	76	102	7	38.00	57.00	3.50
RM16 HF	1610	42	1 5/6"	127	43	80	25	89	105	7	38.00	57.00	4.00
RM25 HF	2517	60	2 1/2"	178	51	123	45	127	149	7	48.00	97.00	11.00
RM30 HF	3020	75	3"	216	65	146	51	152	181	7	54.00	109.00	20.00
RM35 HF	3525	100	4"	248	75	178	65	178	213	7	67.00	137.00	34.00
RM40 HF	4030	110	4 1/2"	298	76	210	76	216	257	7	79.00	159.00	59.00
RM45 HF	4535	125	5"	330	86	230	89	241	286	7	89.00	185.00	80.00
RM50 HF	5040	125	5"	362	92	266	102	267	314	7	92.00	211.00	135.00

All dimensions in millimetres unless otherwise stated.

* J is the wrench clearance to allow for tightening and loosening the bushing on the shaft. The use of a shortened wrench will permit this dimension to be reduced.

† H is the distance between shaft ends.

‡ Approximate mass given are for couplings with mid-range bore Taperlock Bushes. (Sold separately)